


WOODPRIDE EXTERIOR ACRYLIC SOLID HIDE STAIN 9900

Water-based product

Technical Data Sheet

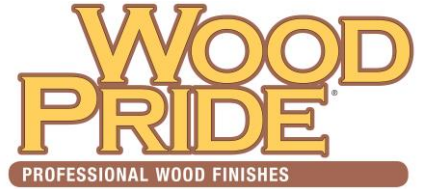

Technical Specifications (21°C (70°F))

Solids by Volume – 34% (+/- 1%)
Solids by Weight – 48% (+/- 1%)

Volatile Organic Compounds (VOCs)*

According to ASTM D3960-05: < 100 g/L
Canadian regulation: < 100 g/L

Colour

White, medium and accent bases

Gloss Level Low Sheen Finish

• n/a

Practical Coverage

Spreading rate for 3.78 L: Up to 56 square metres (600 sq. ft.) on smooth wood; less on rough surfaces.

(Actual coverage will vary depending on substrate and application method.)

Resin Type

• 100% Acrylic

Viscosity* Ready to use (93 – 101 Krebs Units)

Flammability Non Flammable

Flash Point* N/A

Recommended Film Thickness*

• Wet: 4 mils
• Dry: 1.0 mils

Drying Time* @ 77°F/25°C - 50% Relative Humidity

**Drying & recoat times are dependent on temperature, humidity, ventilation and film thickness*

Touch dry: 30 – 60 minutes

To recoat: 4 - 6 hours

Before cleaning: 7 - 10 days

*Technical Data Source: 9900

Product Description

WoodPride Exterior Acrylic Solid Hide Stain 9900 is an exterior coating designed to provide excellent protection from the elements while allowing the natural texture of the wood to show through.

WoodPride Exterior Acrylic Solid Hide Stain 9900:

- High opacity coverage
- 100% acrylic formula promotes a long lasting finish
- Easy clean up with soap and water
- Contains an effective fungicide that prevents and shields against the growth of mildew fungi

Intended Uses

- Exterior new and maintenance work
- Residential and Commercial sites
- A finishing stain for exterior wood surfaces including siding (rough or smooth), shakes, trim, fences and furniture

Certifications - As of September 2013

Approved to:

- MPI – Category #16 Stain for Exterior, Water-based, Solid Hide

PPG Architectural Coatings Canada, Inc. warrants performance of its products to its intended use if properly applied in accordance with the label directions and the specifications of the technical data sheet. Having no control over the application methods and conditions or the circumstances related to its use, no other warranty, expressed or implied, statutory or otherwise is given. This limited warranty extends only to the original purchaser of the product and is not transferable or assignable. If the product fails to conform to this limited warranty, we will, at your option, furnish replacement product or refund the purchase price. This limited warranty excludes (1) labor or costs of labour for the application or removal of any product and (2) all other direct, indirect, incidental, special or consequential damages. Dulux is a registered trademark of AkzoNobel and is licensed to PPG Architectural Coatings Canada, Inc. for use in Canada only. The Multi-Colored Swatches Design is a trademark of PPG Architectural Finishes, Inc. "Woodpride is a registered trademark of AkzoNobel."

August 2014



Available at Dulux Paints Stores across Canada and Betonel-Dulux Stores in Québec

SURFACE PREPARATION

All surfaces must be clean, dry and free of dirt, chalk, grease, wax and loose or peeling stain before painting. Remove all surface contaminants by washing with an appropriate cleaner. Rinse thoroughly with water and allow dry time.

- Mildew must be removed by washing affected area with a solution of 30% household bleach and 70% water. Rinse well.
- Remove all loose and peeling stain by scraping and sand to smooth edges. Wipe off sanding residue.
- If wood exudes resin, scrape the excess and clean surface with alcohol or paint thinner.
- Surfaces that have turned grey due to weathering must be sanded to a new wood appearance. Vacuum sanding residue.
Precaution: Dry sanding, flame cutting and/or welding of dry paint film will give rise to dust and/or hazardous fumes. Wet sanding should be used wherever possible. If exposure cannot be avoided by the provision of local exhaust ventilation, suitable respiratory protective equipment should be used.

Application

Ready-to-use product, do not thin.

Mix thoroughly before use.

Apply using brushes, rollers or spray equipment.

Application Conditions

Apply with good ventilation. Ensure air, material and surface temperatures are above 50°F (10°C). Do not apply if rain, snow or heavy dew is expected within 24 hours. Avoid painting in direct sunlight.

Tools

- Brush – synthetic bristles (nylon, polyester)
- Roller – 10–15 mil lint free
- Spray (Airless equipment) – tip size: 0.013 to 0.019 in - Pressure: 2300 – 2700 psi

**Spray recommendations may vary from figures listed depending on equipment manufacturer*

SYSTEM RECOMMENDATIONS

Two topcoats are recommended on all surfaces for better durability and appearance.

All recommended Wood surfaces:

- WoodPride Acrylic Solid Hide Stain 9900- apply stain to all exposed surfaces of wood. This will provide maximum protection and durability.

Clean-up

Clean hands and tools immediately with warm soapy water.

DO NOT FREEZE

Storage and Transportation

Keep product in a dry and ventilated area, between 10 - 30°C (50 – 86°F).

Disposal

Consult your municipality about proper disposal procedures in accordance with the laws and respect the environment or give leftover paint to someone who could use it: a neighbor or friend, a recreational service or a non-profit organization. Do not pour leftover product down the drain.

Safety Measures

Read the Material Safety Data Sheet. Avoid contact with eyes. Keep out of reach of children. Use only in well ventilated areas. FIRST AID TREATMENT: If in contact with eyes, rinse thoroughly with clear water. If swallowed, do not induce vomiting. Call poison centre or physician immediately.

For product information call: 1-(800)-387-3663
www.dulux.ca